



AFB™ 6610C


Avery Dennison AFB™ 6610C is a transparent acrylic tape with general purpose acrylic adhesive. This solid, dense adhesive offers consistent application performance and creates high internal strength. Clear acrylic core provides visual congruity when used with glass or clear materials. The integral core of solid acrylic polymer provides a structural grade adhesive, while solid composition leads to easy slitting. Suitable for mounting and attachment applications, including bonding handles to sliding glass, seals between inner and outer domes of skylights, backlit signs and edge bonding resin filled glass.

FEATURES:

- Tape with viscoelastic acrylic core
- Closed cell structure
- Acrylic adhesive system
- Easy release polyethylene liner

BENEFITS:

- High adhesion combined with good shear absorbs shock and distributes stress evenly
- Good moisture, UV and high temperature resistance
- Uniform bonding performance
- Can help eliminate the need for mechanical fasteners, drilling or grinding and related clean-up for certain applications
- Polyethylene liner helps provide good moisture stability and easier converting with its high tear strength

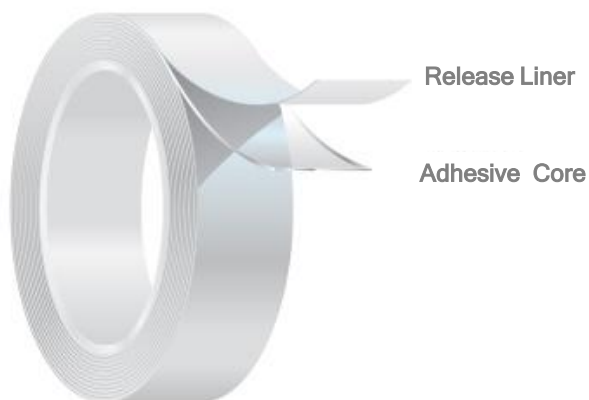

CONSTRUCTION:

Liner:

Red Polyethylene Liner

Carrier and Adhesive:

Clear Acrylic Core

AFB™ 6610C

Adhesive Properties:		Typical Values		
Thickness	ASTM D-3652	US Mils	MM's	Micron's (µm)
Liner:		5.1	0.13	130
Carrier and Adhesive:		39.4	1.00	1001
Total Caliper:		44.5	1.13	1130

PEEL ADHESION Test Method(s): PSTC-101, ASTM D-3330

2 mil PET 90° 12 in /min (305 mm / min)

Substrate		Lbf / In	N / 100 mm
SS	20 min dwell	8.9	156

2 mil PET 90° 12 in /min (305 mm / min)

SS	72 hr dwell	16.0	280

DYNAMIC SHEAR Test Method(s): ASTM D-1002

2 mil PET 0.5 in /min (12.7 mm / min)

Substrate		Lbf / In ²	kPa
Liner	72 hr dwell	74.0	510

NORMAL TENSILE Test Method(s): ASTM D-897Aluminum 2 in / min (50.8 mm / min) 1" sq (6.5 cm²)

Substrate		Lbf / In ²	kPa
Aluminum	72 hr dwell	79.8	550

STATIC SHEAR Test Method(s): PSTC-101, ASTM D-33302 mil PET 1" sq (6.5 cm²) 500 g

Substrate		Min to Fail	
SS	@ 90°C	> 10,000	

TEMPERATURES

	° F	° C
Long Term Temp (10,000 mins)	194 ° F	90 ° C
Short Term Temp (240 mins)	302 ° F	150 ° C

THE LISTED VALUES ARE TYPICAL AND NOT INTENDED TO SERVE AS PRODUCT SPECIFICATIONS

APPLICATION TECHNIQUES

- It is essential, as with all pressure-sensitive tapes, that the surface to which the tape is applied be clean, dry, and free of grease or oil
- Bond strength is dependent upon the amount of adhesive-to-surface contact developed
- Note that different pressure, time and temperature on different (film / rigid) surface achieves different performance

STORAGE / SHELF LIFE

- One year when stored at 64-72°F (18-22°C) / 30-70% relative humidity, out of direct sunlight and in original packaging.

Please refer to Tapes.AveryDennison.com for complete terms and conditions, including warranty terms, relating to this product. You should periodically review the site as terms and conditions are subject to change without notice.

© 2014 Avery Dennison Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison Corporation. All other Avery Dennison brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison Corporation.

Performance
Tapes

Asia Pacific
Kunshan, China,
NO. 618 Nanhe Road
Kunshan Economic &
Technological Zone
China, 215335
Phone: +86 512 57155001
Fax: +86 512 57155059

Europe
Tieblokkenlaan 1
B-2300 Turnhout
Belgium
Phone: +32 (0)14 40 48 11
Fax: +32 (0)14 40 48 55

South America
Rua Francisco Foga, 225
13280-000 Vinhedo
SP Brazil
Phone: +55 19 3876 7736
Fax: +55 19 3876 7682

North America
250 Chester Street
Painesville, Ohio
44077 USA
Phone: +1 866-462-8379
Fax: +1 888-358-4469